


EzRun MAX10 G2S

EzRun MAX10 G2

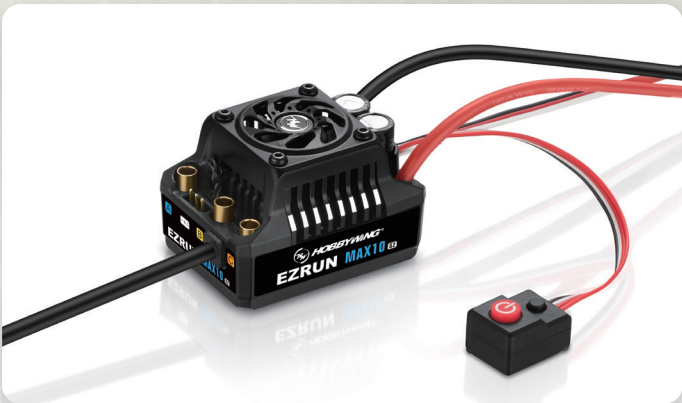


型号	EzRun MAX10 G2S 140A	EzRun MAX10 G2 140A
持电流/峰值电流	140A/880A	140A/880A
电池节数	2-4S Lipo	2-4S Lipo
电调类型	有感无刷	有感无刷
BEC输出	6V/7.4V/8.4V@5A	6V/7.4V@5A
内置蓝牙功能	支持	不支持
内置历史数据	支持	不支持
编程方式	Bluetooth/LCD G2/LCD PRO/OTA	LED/LCD G2/LCD PRO/OTA
参数设定接口	独立编程口	独立编程口
尺寸/重量	53×39.5×37.2mm/125g(含线材插头)	53×39.5×37.2mm/120g(含线材插头)
适用电机	2S锂电：KV≤6000 3652尺寸电机 3S锂电：KV≤4000 3665尺寸电机 4S锂电：KV≤2600 4268尺寸电机	2S锂电：KV≤6000 3652尺寸电机 3S锂电：KV≤4000 3665尺寸电机 4S锂电：KV≤2600 4268尺寸电机
主要适用车型	1/10 th 短卡/卡车/大脚车	1/10 th 短卡/卡车/大脚车

EzRun MAX10 G2S



EzRun MAX10 G2

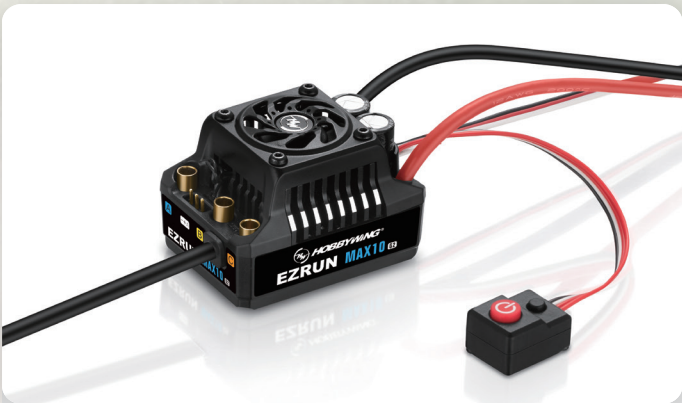


Model	EzRun MAX10 G2S 140A	EzRun MAX10 G2 140A
Cont. / Peak Current	140A/880A	140A/880A
Lipo Cells	2-4S Lipo	2-4S Lipo
ESC Type	Sensored & Brushless	Sensored & Brushless
BEC Output	6V/7.4V/8.4V@5A	6V/7.4V@5A
Built-in Bluetooth	Yes	No
Built-in Historical Data	Yes	No
Programming Port	Bluetooth/LCD G2/LCD PRO/OTA	LED/LCD G2/LCD PRO/OTA
Separate Program Port	Separate	Separate
Size / Weight	53×39.5×37.2mm/125g(w/Wires)	53×39.5×37.2mm/120g(w/Wires)
Applicable Motors	With 2S Lipo: KV ≤ 6000 3652 size motor With 3S Lipo: KV ≤ 4600 3665 size motor With 4S Lipo: KV ≤ 2600 4268 size motor	With 2S Lipo: KV ≤ 6000 3652 size motor With 3S Lipo: KV ≤ 4600 3665 size motor With 4S Lipo: KV ≤ 2600 4268 size motor
Compatible Vehicles	1/10 th Short Course Truck, Truck and Monster Truck	1/10 th Short Course Truck, Truck and Monster Truck

EzRun MAX10 G2S



EzRun MAX10 G2

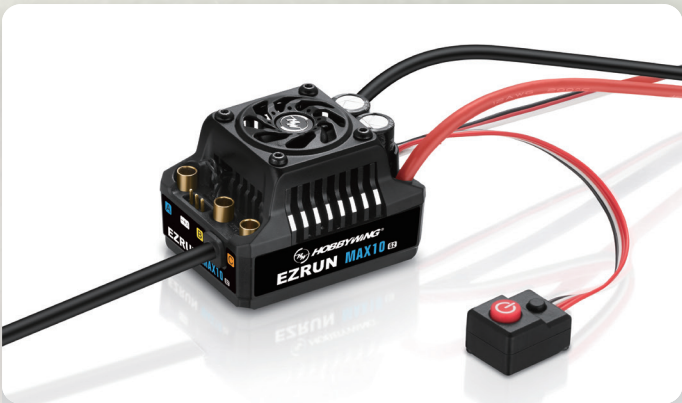


型号	EzRun MAX10 G2S 80A	EzRun MAX10 G2 80A
持电流/峰值电流	80A / 520A	80A / 520A
电池节数	2-3S Lipo	2-3S Lipo
电调类型	有感无刷	有感无刷
BEC输出	6V/7.4V/8.4V@5A	6V/7.4V@5A
内置蓝牙功能	支持	不支持
内置历史数据	支持	不支持
编程方式	蓝牙/LCD G2/LCD PRO/OTA	LED/LCD G2/LCD PRO/OTA
参数设定接口	独立编程口	独立编程口
尺寸/重量	53×39.5×37.2mm/125g(含线材插头)	53×39.5×37.2mm/120g(含线材插头)
适用电机	2S锂电: KV≤6000 3S锂电: KV≤4200 3652/3665尺寸电机	2S锂电: KV≤6000 3S锂电: KV≤4200 3652/3665尺寸电机
主要适用车型	1/10 th 平路/越野/拉力/短卡	1/10 th 平路/越野/拉力/短卡

EzRun MAX10 G2S



EzRun MAX10 G2

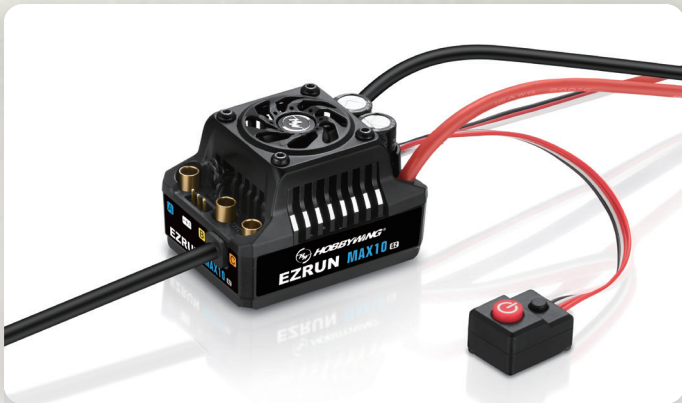

Model	EzRun MAX10 G2S 80A	EzRun MAX10 G2 140A
Cont. / Peak Current	80A / 520A	80A / 520A
Lipo Cells	2-3S Lipo	2-3S Lipo
ESC Type	Sensored & Brushless	Sensored & Brushless
BEC Output	6V/7.4V/8.4V@5A	6V/7.4V@5A
Built-in Bluetooth	Yes	No
Built-in Historical Data	Yes	No
Programming Port	Bluetooth/LCD G2/LCD PRO/OTA	LED/LCD G2/LCD PRO/OTA
Separate Program Port	Separate	Separate
Size / Weight	53×39.5×37.2mm/125g(w/Wires)	53×39.5×37.2mm/120g(w/Wires)
Applicable Motors	With 2S Lipo: KV ≤ 6000 With 3S Lipo: KV ≤ 4200 3652/3665 size motor	With 2S Lipo: KV ≤ 6000 With 3S Lipo: KV ≤ 4200 3652/3665 size motor
Compatible Vehicles	1/10 th On-road, Buggy, Rally, Short Course Truck	1/10 th On-road, Buggy, Rally, Short Course Truck