




SV-1262MG




Line	BLACK EDITION
Application	CAR HELI AIRPLANE
Servo Size	Mini
Operating Voltage	6.0V-8.4V
Speed	0.085 s/60°
Torque	9 kg/cm 125 oz/in
Amplifier Type	Digital Controller
Motor Type	Coreless
Case Type	Hybrid (Aluminum/Composite)
Protection	Water Resistant
Dimensions (L x W x H)	32.4 x 16.8 x 30.3 mm
Weight	30 g
Gear Type	Hybrid (Metal/Composite)

DIMENSIONS

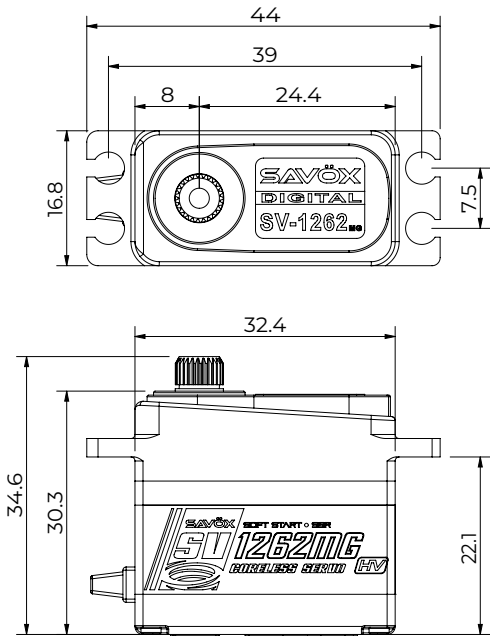

PERFORMANCE RADAR

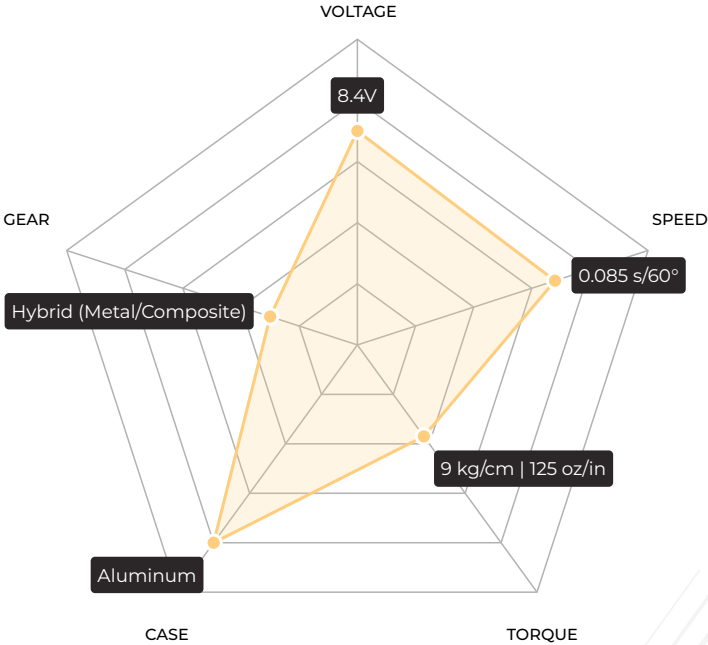

DETAILED SPECIFICATION

Compability	Sanwa SUR, SSR; Futaba UR, SR	Potentiometer	VR
Speed @6.0V	0.11 s/60°	Cable	26 AWG 250 ±5 mm
Torque @6.0V	4.6 kg/cm 63.9 oz/in	Connector	JR Connector
Speed @7.4V	0.095 s/60°	Stall Current @6.0V	1700 mA
Torque @7.4V	7 kg/cm 97.2 oz/in	Operating Current @6.0V	100 mA
Speed @8.4V	0.085 s/60°	Stall Current @7.4V	2000 mA
Torque @8.4V	9 kg/cm 125 oz/in	Operating Current @7.4V	120 mA
PCB Board	12-bit	Stall Current @8.4V	2200 mA
Rotating Direction	Counterclockwise (when 1000+2000 µsec)	Operating Current @8.4V	150 mA
Max Travel	~154° (when 800+2200 µsec)	Idle Current	5 mA
Operating Travel	110° (when 1000+2000 µsec)	Dead Band Width	3-5 µsec
Neutral Position	1500 µsec	Frequency Range	50-360 Hz
Horn Gear Spline	25T(Φ6)	Control System	Pulse width modification
Bearing	2x Ball Bearings	Operating Temperature	-10°C to 50°C